

Series Name DL-06 Recessed Mount Led Downlight



Specification

CCT	3000K/4000K/5000K Switchable
Efficacy	85lm/w
Size	4/6/8/10 inch
Lumen	N/A
Wattage	6W-50W
Input Voltage	AC120-277V
Dimming option	0-10V
Dimming depth	N/A
Life span	50000H
Light Source Type	LED
Number of light sources	1
Mounting Type	Recessed
Thickness of ceiling	N/A
Material	Aluminum
Color	White/Silver
Surface processes	N/A
Net Weight (Piece)	N/A
Cutout	N/A
IP Rating	N/A

Description

The CCT Switchable feature offers three temperature options: 3000K, 3500K, and 4000K, as well as 3500K, 4000K, and 5000K, with an additional choice of 3000K, 4000K, and 5000K. The power is switchable across different wattages, including 12W, 8W, and 6W, 30W, 23W, and 15W, and 50W, 42W, and 37W. The UL frame is universal for retrofit, remodel, and new construction applications. Optional emergency battery backup units are available for 120-277V. The fixture is IC type and has a lifetime of 50,000 hours with 70% lumen maintenance.

Accessories Available



Working on a new project or remodeling an old one





New Construction



Emergency Backup Solution UL Approved

APPEARANCE-CCT & POWER SWITCHABLE

NEW CONSTRUCTION

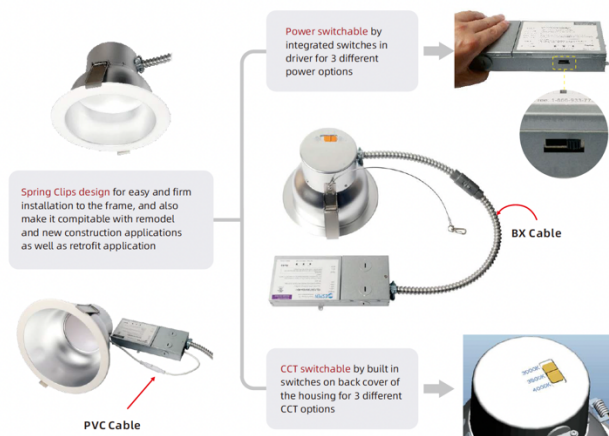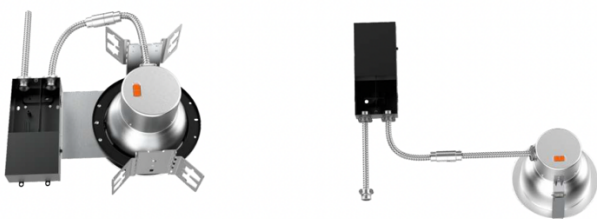



Energy Savings
Reduce between 50-80% energy consumption compared to traditional sources



Low Labor Costs
Minimum install and cleanup time



Environmental Impact
Last up to 25 times longer than traditional sources

Series	Product Dimension (mm)	Wattage	Color	Input Voltage	Dimmable	Efficiency	Lumen	CRI	CCT(K)	cutout (mm)
4"	150x123	12W/8W/6W Switchable	White/ Silver	120-277V	0-10V	85lm/w	977lm-12W 637lm-8W 510m-6W	80	3000K/3500K/4000K 3500K/4000K/5000K 3000K/4000K/5000K Switchable optional	105
6"	195x150	12W/8W/6W Switchable	White/ Silver	120-277V	0-10V		977lm-12W 637lm-8W 510m-6W			158
		30W/23W/15W Switchable	White/ Silver	120-277V	0-10V		2550lm-30W 1955lm-23W 1275m-15W			
8"	235x181	12W/8W/6W Switchable	White/ Silver	120-277V	0-10V		977lm-12W 637lm-8W 510m-6W			204
		30W/23W/15W Switchable	White/ Silver	120-277V	0-10V		2550lm-30W 1955lm-23W 1275m-15W			
		50W/42W/37W Switchable	White/ Silver	120-277V	0-10V		4250lm-50W 3570lm-42W 3145m-37W			
10"	215x202	30W/23W/15W Switchable	White/ Silver	120-277V	0-10V		2550lm-30W 1955lm-23W 1275m-15W			240
		50W/42W/37W Switchable	White/ Silver	120-277V	0-10V		4250lm-50W 3570lm-42W 3145m-37W			