


Series Name PL-01 Troffer

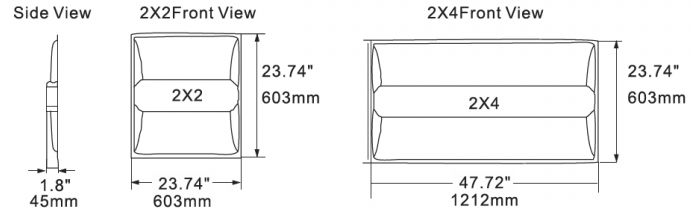


Specification

CCT	3500K/4000K/5000K switchable
Beam Angle	N/A
SDCM	SDCM≤6
Color Rendering Index	Ra≥80
Wattage	25W/30W/35W switchable
Input Voltage	AC100-240V
Dimming option	Yes
Dimming depth	10%-100%
Life span	50000H
Light Source Type	LED (COB)
Number of light sources	1
Mounting Type	Surface
Thickness of ceiling	N/A
Material	Aluminum
Color	White
Surface processes	N/A
Net Weight (Piece)	N/A
Protection class	Class I
IP Rating	IP20

Description

The modern commercial-grade design of this product includes tunable act and wattage features, with an aluminum structure for improved heat dissipation. It is equipped with a high-efficiency isolated LED driver, ensuring low voltage protection and high density for uniform light output. Additionally, the design incorporates high light transmittance for optimal performance.

Accessories Available

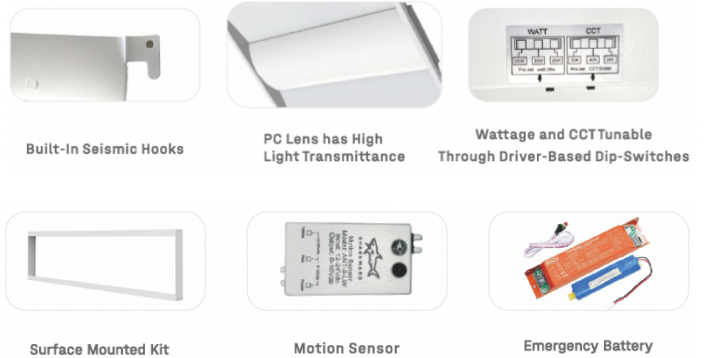

Size	Watt	Input	Dimmable	CCT	Lm
2x2ft	25w/30w/ 35w switchable	AC100-277V	0-10v	3500/4000/ 5000k switchable	3125lm 3750lm 4375lm
2x4ft	40w/45w/ 50w switchable	AC100-277V	0-10v	3500/4000/ 5000k switchable	5000lm 5625lm 6250lm