



Series Name **PL-02 LED Edge-Lit Panel Light**

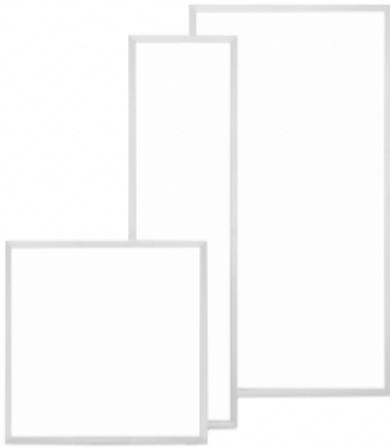

Part No.	A(inch)	B(inch)	C(inch)	D(inch)
2x2ft	23.74"	23.74"	0.47"	1.97"
1x4ft	47.42"	11.93"	0.47"	1.97"
2x4ft	47.42"	23.74"	0.47"	1.97"

Specification

CCT	3000Kto5000K
Beam Angle	N/A
SDCM	SDCM≤6
Color Rendering Index	Ra≥90
Wattage	30-60W
Input Voltage	AC100-240V
Dimming option	0-10V
Dimming depth	N/A
Life span	50000H
Light Source Type	LED
Number of light sources	1
Mounting Type	Surface
Thickness of ceiling	N/A
Material	Aluminum
Color	White
Size	2x2 feet, 4x2 feet, 1x4 feet
Lumen	3900lm-7800lm
Protection class	Class I
IP Rating	IP20

Description

The luminaire features a slim and solid design with a non-yellowing PC diffuser, ensuring uniform distribution. Its isolated driver, along with easy installation and low maintenance costs, enhances user convenience. Additionally, the inclusion of a special clip for EM Battery further adds to the practicality and versatility of the lighting solution.

Accessories Available



Surface Mounted Kit



Flange Kit



Emergency Battery

Size	Watt	Input	Dimmable	CCT	Lm
2x2ft	30w	AC100-277V AC200-347V	0-10v	3000K-5000K	3900lm
2x2ft	36w	AC100-277V AC200-347V	0-10v	3000K-5000K	4680lm
1x4ft	36w	AC100-277V AC200-347V	0-10v	3000K-5000K	4680lm
2x4ft	40w	AC100-277V AC200-347V	0-10v	3000K-5000K	5200lm
2x4ft	48w	AC100-277V AC200-347V	0-10v	3000K-5000K	6240lm
2x4ft	60w	AC100-277V AC200-347V	0-10v	3000K-5000K	7800lm