Series Name WL-07 Cylinder Outdoor Wall Sconce





Specification


CCT	27/30/40/50K
Beam Angle	110°
SDCM	SDCM≤7
Color Rendering Index	Ra≥90
Wattage	10, 20W
Input Voltage	120VAC
Lumens	700,1400lm
Dimming option	Triac
Dimming range	10%~100%
Life span	50000Н
Light Source Type	LED
Number of light sources	2or1
Mounting Type	Surface Mount
Product Dimension	L7 or 12*W4.72*H5.37in
Material	Aluminum, Glass
Color	Black or Metalic
Surface processes	Painting
Net Weight (Piece)	N/A
IP Rating	IP65









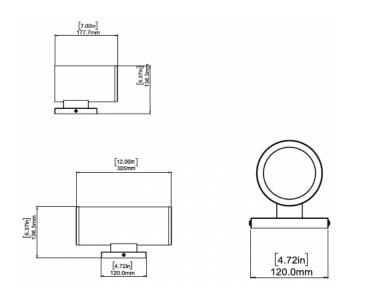

Description

Constructed with a durable aluminum housing for optimal heat dissipation, this versatile lighting solution offers single or dual side directional options and precise optics achieving up to 70lm/W efficiency. Its quick installation process allows surface mounting to most junction boxes, while its IP65 weatherproof rating ensures reliability outdoors. Certified for wet locations by cETLus, it's equipped with selectable 5-CCT options from 2700K to 5000K for customizable lighting. Backed by a 3-year limited warranty, it's a dependable choice for outdoor settings.