


DL-03 INTERIOR WALL WASHER

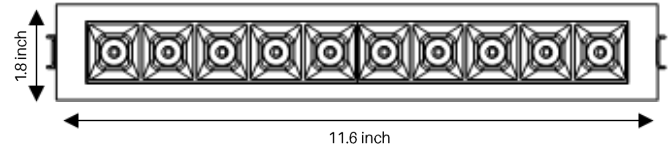

SPECIFICATIONS

CCT	27/30/35/40/50K
BEAM ANGLE	110°
SDCM	SDCM \geq 7
COLOR RENDERING INDEX	RA \geq 80
WATTAGE	24W
INPUT VOLTAGE	120VAC
LUMENS	1300lm
DIMMING OPTION	TRIAC
DIMMING RANGE	10%-100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	10,5,4,2
MOUNTING TYPE	RECESSED
PRODUCT DIMENSIONS	L11.6 x W1.8 x H1.6
MATERIAL	ALUMINUM, PLASTIC
COLOR	BLACK
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	0.96KG
IP RATING	IP44

DESCRIPTION

This fixture boasts a durable aluminum housing that ensures excellent heat dissipation, coupled with a corrosion and heat-resistant powder-coated finish. Each fixture comes equipped with a junction box featuring an integrated driver and either a single CCT or multiple CCT option for customization. The fixture operates with a 120V/60Hz input. Additionally, it is cETLus listed for wet locations, ensuring suitability in a variety of environmental conditions.

