


DL-04 ADJUSTABLE ANGLE RECESSED DOWNLIGHT

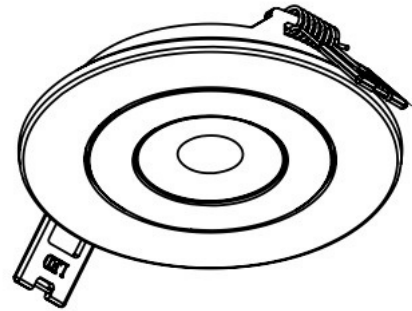

SPECIFICATIONS

CCT	27/30/35/40/50K
BEAM ANGLE	38°
SDCM	SDCM \geq 7
COLOR RENDERING INDEX	RA \geq 90
WATTAGE	8W/14W/18W
INPUT VOLTAGE	120VAC
LUMENS	70lm/W
DIMMING OPTION	TRIAC
DIMMING RANGE	10%-100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	RECESSED
PRODUCT DIMENSIONS	DIA 4/5/7 INCH
MATERIAL	ALUMINUM, PLASTIC
COLOR	WHITE/SATIN NICKEL
SURFACE PROCESSES	N/A
NET WEIGHT (PIECE)	0.35KG
IP RATING	IP44

DESCRIPTION

Durable aluminum housing allows excellent heat dissipation. Corrosion and heat resistance powder coated or satin nickel finish. Superior LED performance and lifespan. 120V/60Hz. Every fixture includes a junction box with integrated dimmable driver. Available in 2700-5000K color temperature, single CCT and multiple CCT. Precise optics for maximum efficiency, up to 70lm/W. Dimmable down to 10% compatible with Triac and ELV dimmers. cETLus listed for wet locations. ES listed. 90° tilting, 360° rotation.

