LINEAR LIGHT



LL-03 EXTERIOR WALL WASHER












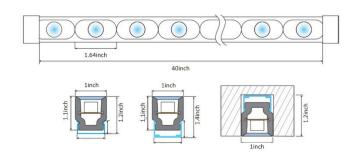


SPECIFICATIONS

CCT	2700-6500K
BEAM ANGLE	15°/25°/35°/20*55°
SDCM	SDCM≥5
COLOR RENDERING INDEX	RA≥90
WATTAGE	3.72 w/ft
INPUT VOLTAGE	DC24V
LUMENS	592.68 lm/ft
DIMMING OPTION	TRIAC/0-10V/DALI
DIMMING RANGE	N/A
LIFE SPAN	30000H
LIGHT SOURCE TYPE	LED (3030)
NUMBER OF LIGHT SOURCES	24 PCS/M
MOUNTING TYPE	RECESSED/FLUSH
PRODUCT DIMENSIONS	1.1 inch X 1 inch
MATERIAL	SILICONE
COLOR	BLACK
SURFACE PROCESSES	N/A
NET WEIGHT (PIECE)	N/A
IP RATING	IP67

DESCRIPTION

LED adopts high-gloss 3030 customized lamp beads. Colors include two-color. Control mode is switch/SPI. The silicone material gives it good flexibility. Surface is dust proof and UV resistant. Anti-collision level is IK07.


AVAILABLE ACCESSORIES




Bendable bracket



Aluminum channel



Beam angle: 25°



Beam angle: 20° * 55°