


LL-07 LED VAPOR TIGHT

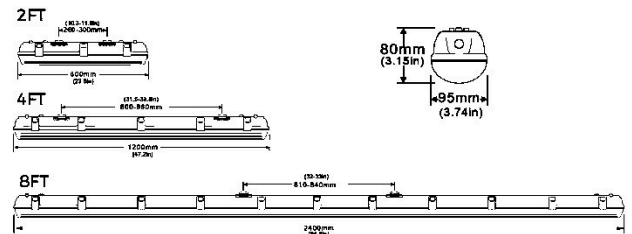

SPECIFICATIONS

CCT	3000/4000/5000K
BEAM ANGLE	N/A
SDCM	SDCM \geq 7
COLOR RENDERING INDEX	RA \geq 90
WATTAGE	15-80W
INPUT VOLTAGE	AC100-277V
LUMENS	160lm/w
DIMMING OPTION	0-10V
DIMMING RANGE	N/A
LIFE SPAN	100,000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE/PENDANT
PRODUCT DIMENSIONS	L 24/8' x W 3.74" x H 3.15"
MATERIAL	ALUMINUM, PLASTIC
COLOR	WHITE
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	N/A
IP RATING	IP65

DESCRIPTION

The vapor tight fixture is a fully enclosed light ideal for damp places such as stairwells, hallways, and parking garages. The dimmable light comes with CCT options of 3000K, 4000K, and 5000K. It is cETLus certified, with an input voltage of AC100-277V and has an output of 160Lm/W. With size options of 2, 4, and 8 feet, and surface or pendant mount options, it allows for installation versatility. Hardware for surface and pendant mounts are included, with an option for a waterproof cable gland. With a 100,000-hour life span, this fixture is built to last in the most extreme conditions.

