


PL-01 TROFFER

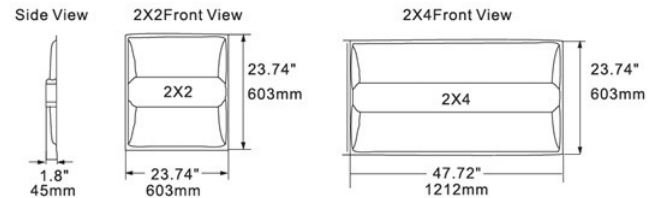


SPECIFICATIONS

CCT	3500/4000/5000K
BEAM ANGLE	N/A
SDCM	SDCM \geq 6
COLOR RENDERING INDEX	RA \geq 80
WATTAGE	25/30/35W
INPUT VOLTAGE	AC100-240V
LUMENS	3125-6250lm
DIMMING OPTION	YES
DIMMING RANGE	10-100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED (COB)
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	2x2 ft or 2x4 ft
MATERIAL	ALUMINUM
COLOR	WHITE
SURFACE PROCESSES	N/A
NET WEIGHT (PIECE)	N/A
IP RATING	IP20

DESCRIPTION

The modern commercial-grade design of this product includes tunable ACT and wattage features, with an aluminum structure for improved heat dissipation. It is equipped with a high-efficiency isolated LED driver, ensuring low voltage protection and high density for uniform light output. Additionally, the design incorporates high light transmittance for optimal performance.

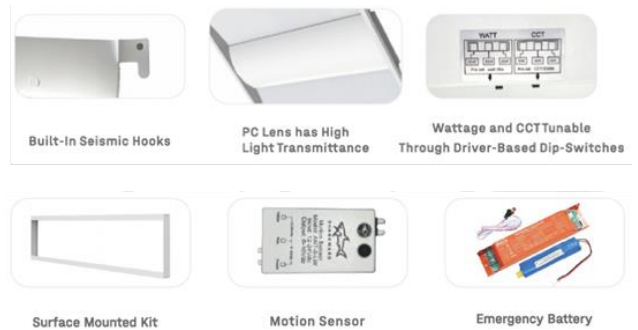

Size	Watt	Input	Dimmable	CCT	Lm
2x2ft	25w/30w/ 35w switchable	AC100-277V	0-10v	3500/4000/ 5000k switchable	3125lm 3750lm 4375lm
2x4ft	40w/45w/ 50w switchable	AC100-277V	0-10v	3500/4000/ 5000k switchable	5000lm 5625lm 6250lm