



## PL-02 LED EDGE-LIT PANEL

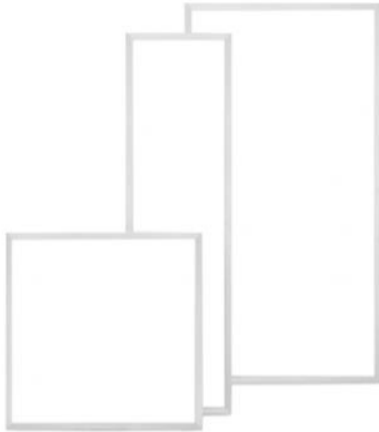

Part No.	A(inch)	B(inch)	C(inch)	D(inch)
2x2ft	23.74"	23.74"	0.47"	1.97"
1x4ft	47.42"	11.93"	0.47"	1.97"
2x4ft	47.42"	23.74"	0.47"	1.97"

### SPECIFICATIONS

CCT	3000-5000K
BEAM ANGLE	N/A
SDCM	SDCM $\geq$ 6
COLOR RENDERING INDEX	RA $\geq$ 90
WATTAGE	30-60W
INPUT VOLTAGE	AC100-240V
LUMENS	3900-7800lm
DIMMING OPTION	0-10V
DIMMING RANGE	N/A
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	2x2, 2x4, 1x4 ft
MATERIAL	ALUMINUM
COLOR	WHITE
SURFACE PROCESSES	N/A
NET WEIGHT (PIECE)	N/A
IP RATING	IP20

### DESCRIPTION

The luminaire features a slim and solid design with a non-yellowing PC diffuser, ensuring uniform distribution. Its isolated driver, along with easy installation and low maintenance costs, enhances user convenience. Additionally, the inclusion of a special clip for EM Battery further adds to the practicality and versatility of the lighting solution.



Slim Design



High Quality LEDs and Non-Yellowing Diffuser



Special Clip for EM Battery



Surface Mounted Kit



Flange Kit



Emergency Battery



Size	Watt	Input	Dimmable	CCT	Lm
2x2ft	30w	AC100-277V AC200-347V	0-10v	3000K-5000K	3900lm
2x2ft	36w	AC100-277V AC200-347V	0-10v	3000K-5000K	4680lm
1x4ft	36w	AC100-277V AC200-347V	0-10v	3000K-5000K	4680lm
2x4ft	40w	AC100-277V AC200-347V	0-10v	3000K-5000K	5200lm
2x4ft	48w	AC100-277V AC200-347V	0-10v	3000K-5000K	6240lm
2x4ft	60w	AC100-277V AC200-347V	0-10v	3000K-5000K	7800lm