


SL-01 CEILING SPOTLIGHT

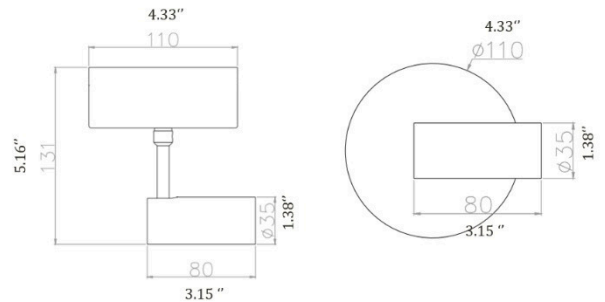


SPECIFICATIONS

CCT	3000/4000/6000K
BEAM ANGLE	30°
SDCM	SDCM≥6
COLOR RENDERING INDEX	RA≥90
WATTAGE	6W
INPUT VOLTAGE	AC100-240V
LUMENS	400lm
DIMMING OPTION	YES
DIMMING RANGE	N/A
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED (COB)
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	SEE DIAGRAM
MATERIAL	ALUMINUM
COLOR	BLACK
SURFACE PROCESSES	SAND BLACK
NET WEIGHT (PIECE)	0.4255KG
IP RATING	IP20

DESCRIPTION

The ceiling spotlight utilizes a cold forging process for uniform heat dissipation accompanied by a deep anti-glare design and professional optics that result in precise and rounded spots. With a rotation capability of 350° and a tilt of 90°, it fully satisfies diverse lighting requirements in all aspects.

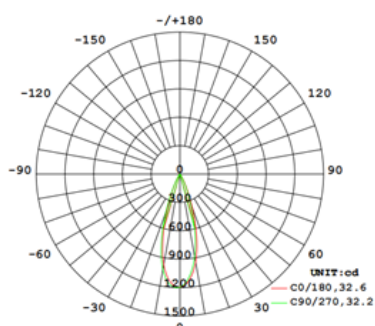

	H (m)	E (lx)	D (cm)
30°	1	800	57
6W	2	200	115
1194cd	3	89	172
400lm	4	32	288
UGR<16			