


# VANITY LIGHTING

**ONESPACE** LIGHTING SOLUTIONS

## VL-03 VANITY LIGHT

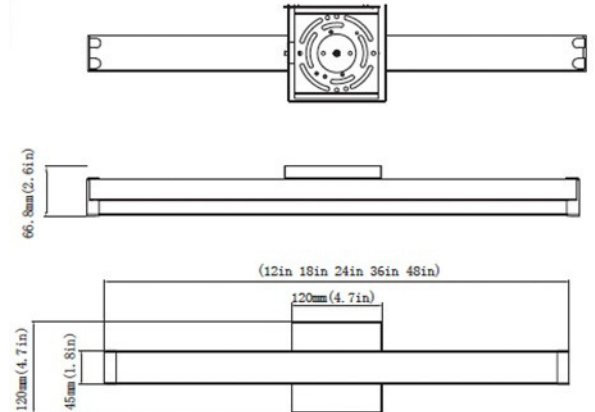

### SPECIFICATIONS

CCT	27/30/35/40/50K
BEAM ANGLE	110°
SDCM	SDCM <sub>≥</sub> 7
COLOR RENDERING INDEX	RA <sub>≥</sub> 90
WATTAGE	8/12/16/24/32W
INPUT VOLTAGE	120-277VAC
LUMENS	560-2240lm
DIMMING OPTION	TRIAC
DIMMING RANGE	10%~100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED (COB)
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	L12/18/24/36/48W4.7H2.6"
MATERIAL	ALUMINUM, PLASTIC
COLOR	BLACK/BRUSHED NICKEL
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	N/A
IP RATING	IP44

### DESCRIPTION

Constructed with a durable aluminum housing that facilitates optimal heat dissipation, this lighting fixture boasts both corrosion and heat resistance through its powder-coated or satin nickel finish. With a versatile input range of 120V-277V and compatibility with 120V Triac dimming, it offers flexibility in various settings. Featuring color temperature options ranging from 2700K to 5000K and available in single CCT or multiple CCT configurations. Engineered with precise optics for heightened efficiency, achieving up to 70lm/W, and dimmable down to 10%. Compatibility with Triac and ELV dimmers, it allows for tailored brightness control. Certified for damp locations by cETLus and FCC T24 listed, it assures safety and compliance. Backed by a 5-year limited warranty, this lighting solution guarantees both performance and longevity.

