


WL-01 STEP LIGHT

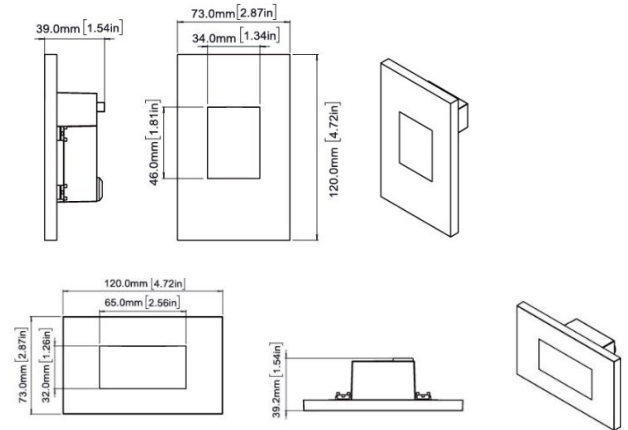

SPECIFICATIONS

CCT	27/30/35/40/50K
BEAM ANGLE	110°
SDCM	SDCM _≥ 7
COLOR RENDERING INDEX	RA _≥ 80
WATTAGE	3W
INPUT VOLTAGE	120VAC
LUMENS	70lm
DIMMING OPTION	TRIAC
DIMMING RANGE	10%~100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	RECESSED
PRODUCT DIMENSIONS	L4.96 x W3.07 x H1.59"
MATERIAL	ALUMINUM, PLASTIC
COLOR	WHITE
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	0.13KG
IP RATING	IP67

DESCRIPTION

The durable aluminum housing, featuring excellent heat dissipation, boasts a corrosion and heat-resistant powder-coated finish. With a 120VAC input and DOB design, this lighting solution is available in a versatile 2700-5000K color temperature range. Offering enhanced energy efficiency and optimized light output, it effectively illuminates stairs, walls, and walkways with minimal glare. Suitable for both indoor and outdoor applications, it can be easily installed onto a standard 4in electrical junction box. Furthermore, it is cETLus listed for wet locations, ensuring reliable performance in various environments.

