


WL-03 SLIM OUTDOOR WALL SCONCE

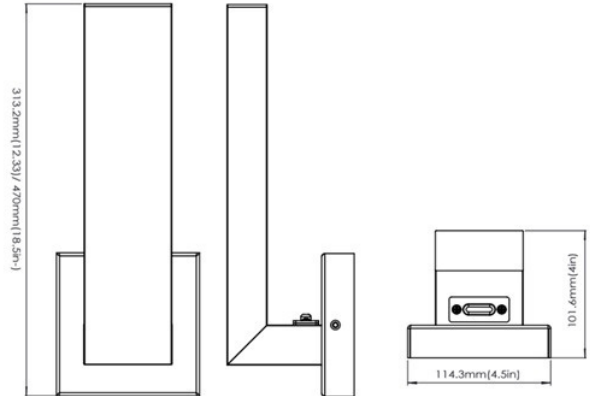

SPECIFICATIONS

CCT	27/30/35/40/50K
BEAM ANGLE	110°
SDCM	SDCM \geq 7
COLOR RENDERING INDEX	RA \geq 80
WATTAGE	30W
INPUT VOLTAGE	120VAC
LUMENS	1200lm
DIMMING OPTION	TRIAC
DIMMING RANGE	10%~100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	L12" x W4.5" x H4"
MATERIAL	ALUMINUM, PLASTIC
COLOR	BLACK
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	0.98KG
IP RATING	IP65

DESCRIPTION

The durable aluminum housing of this fixture enables excellent heat dissipation, complemented by a corrosion and heat-resistant powder-coated finish. It offers both single CCT and multiple CCT options for selection, with a 120VAC input. The installation process is quick and simple, allowing surface mounting to most junction boxes. Additionally, it is reliable in any weather conditions, boasting an IP65 weatherproof rating, and is cETLus listed for wet locations, ensuring its suitability for various outdoor environments.