


## WL-05 CRYSTAL WALL SCONCE

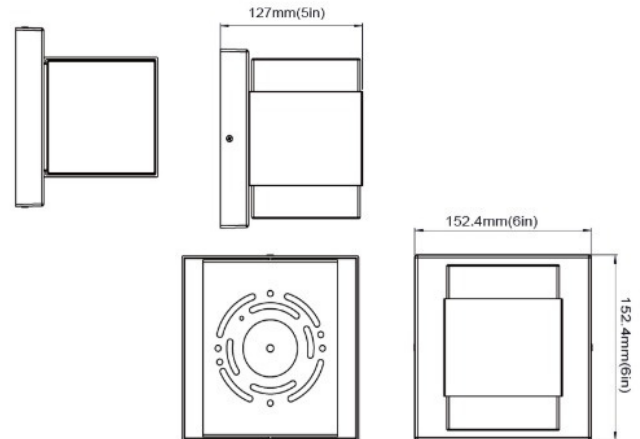

### SPECIFICATIONS

CCT	27/30/35/40/50K
BEAM ANGLE	110°
SDCM	SDCM $\geq$ 7
COLOR RENDERING INDEX	RA $\geq$ 80
WATTAGE	20W
INPUT VOLTAGE	120VAC
LUMENS	1600lm
DIMMING OPTION	TRIAC
DIMMING RANGE	10%~100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	2
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	L 6" x W 5" x H 6"
MATERIAL	ALUMINUM, PLASTIC
COLOR	BLACK
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	0.84KG
IP RATING	IP65

### DESCRIPTION

Powder-coated finish featuring UV-resistant acrylic lens. Robust aluminum housing facilitates efficient heat dissipation. Choice between single CCT and multiple CCT options. Input of 120V/60Hz with built in driver. Precision optics ensure maximum efficiency, delivering up to 70lm/W. cETLus listed for wet locations.

