


WL-06 WALL PACK

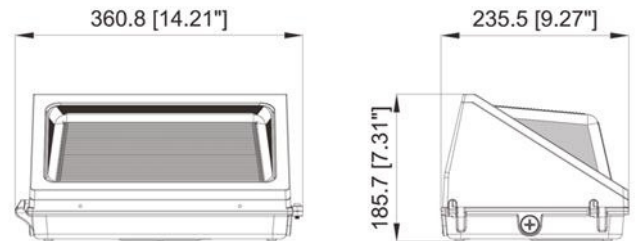

SPECIFICATIONS

CCT	35/40/50K SWITCHABLE
BEAM ANGLE	110°
SDCM	SDCM \geq 7
COLOR RENDERING INDEX	RA \geq 80
WATTAGE	80/100/120W
INPUT VOLTAGE	120VAC
LUMENS	130lm/w
DIMMING OPTION	TRIAC
DIMMING RANGE	10%~100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	L14.21" x W9.27" x H7.31"
MATERIAL	ALUMINUM, PLASTIC
COLOR	BLACK
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	N/A
IP RATING	IP65

DESCRIPTION

The luminaire features a robust solid structure with a discreetly designed glass cover that conceals screws, ensuring a sleek appearance. Its high-quality LED technology provides uniform and tunable light, accommodating various color temperatures and wattage settings. The luminaire boasts an excellent thermal management system for optimal performance, coupled with waterproof capabilities. The anti-yellow glass cover enhances durability, while the inclusion of a button-type photocell adds convenience to its functionality.

Watt	Input	Dimmable	CCT	LM/W
45W/60W/80W switchable	AC120-277V	0-10v	3500/4000/5000k switchable	130LM/W
60W/80W/100W switchable	AC120-277V	0-10v	3500/4000/5000k switchable	130LM/W
80W/100W/120W switchable	AC120-277V	0-10v	3500/4000/5000k switchable	130LM/W



Anti-yellow Glass Cover



Silicone Ring Can Be Waterproof



Button Type Photocell



Wire Guard