


WL-07 CYLINDER OUTDOOR WALL SCONCE

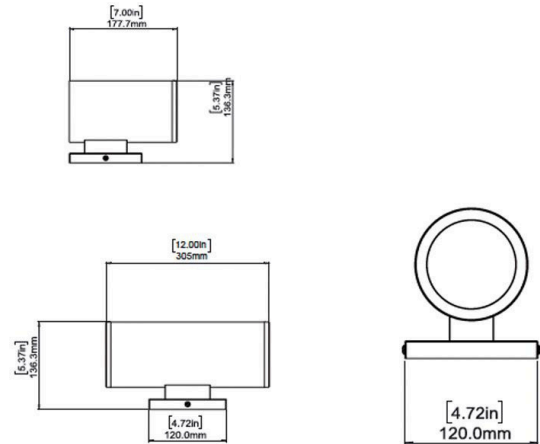

SPECIFICATIONS

CCT	27/30/40/50K
BEAM ANGLE	110°
SDCM	SDCM \geq 7
COLOR RENDERING INDEX	RA \geq 90
WATTAGE	10/20W
INPUT VOLTAGE	120VAC
LUMENS	700/1400lm
DIMMING OPTION	TRIAC
DIMMING RANGE	10%~100%
LIFE SPAN	50000H
LIGHT SOURCE TYPE	LED
NUMBER OF LIGHT SOURCES	1 or 2
MOUNTING TYPE	SURFACE
PRODUCT DIMENSIONS	L7"/12" x W4.72" x H6.37"
MATERIAL	ALUMINUM, GLASS
COLOR	METALIC/BLACK
SURFACE PROCESSES	PAINTING
NET WEIGHT (PIECE)	N/A
IP RATING	IP65

DESCRIPTION

Constructed with a durable aluminum housing for optimal heat dissipation, this versatile lighting solution offers single or dual side directional options and precise optics achieving up to 70lm/W efficiency. Its quick installation process allows surface mounting to most junction boxes, while its IP65 weatherproof rating ensures reliability outdoors. Certified for wet locations by cETLus, it's equipped with selectable 5 CCT options from 2700K to 5000K for customizable lighting.

